




Stainless Steel

FL-Series Foundationless Floor Mounted Jib Crane 1/2 Ton Capacity

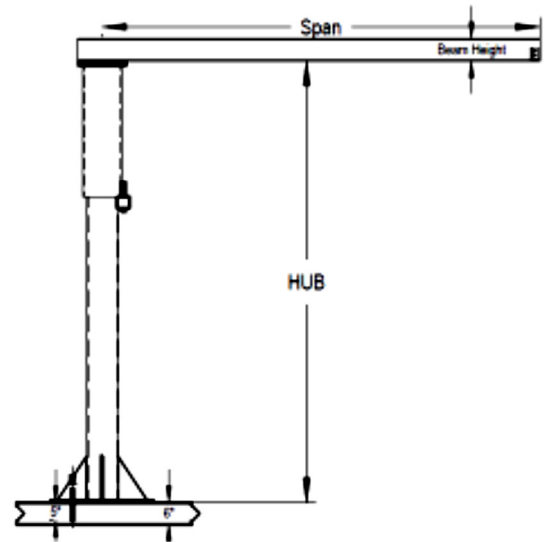

Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Unit Weight
1000	FL186-SS	8'	6'	6"	4"	30"	598#
1000	FL188-SS	8'	8'	6"	4"	30"	630#
1000	FL1810-SS	8'	10'	8"	5-1/4"	30"	827#
1000	FL1812-SS	8'	12'	8"	5-1/4"	30"	911#
1000	FL1814-SS	8'	14'	8"	5-1/4"	36"	1,019#
1000	FL1106-SS	10'	6'	6"	4"	30"	642#
1000	FL1108-SS	10'	8'	6"	4"	30"	674#
1000	FL11010-SS	10'	10'	8"	5-1/4"	30"	884#
1000	FL11012-SS	10'	12'	8"	5-1/4"	30"	968#
1000	FL11014-SS	10'	14'	8"	5-1/4"	36"	1,075#
1000	FL1126-SS	12'	6'	6"	4"	30"	687#
1000	FL1128-SS	12'	8'	6"	4"	30"	719#
1000	FL11210-SS	12'	10'	8"	5-1/4"	30"	940#
1000	FL11212-SS	12'	12'	8"	5-1/4"	30"	1,024#
1000	FL11214-SS	12'	14'	8"	5-1/4"	36"	1,131#

Effective 11/2019

NOTE:

- Existing concrete must be a minimum of 6" thick reinforced with a minimum 3,000 psi (5 bag mix), soil pressure must support 2,500 psi.
- Concrete in and around the area (6' x 6') of the base plate must be free of cracks and must appear in good condition.
- Units with 30" diameter base have 26" bolt circle 12 holes 1-1/4" diameter.
- Units with 36" diameter base have 32" bolt circle 12 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

Options: TG-SS Stainless Tagline Kit with S'Hooks

AB-FL1-SS Stainless Epoxy Anchor Kits, 12 bolts

30D12 Bolt Pattern Templates

Hoists & Trolleys - Contact Sales

