




FL-Series Foundationless Floor Mounted Jib Crane 1/4 Ton Capacity

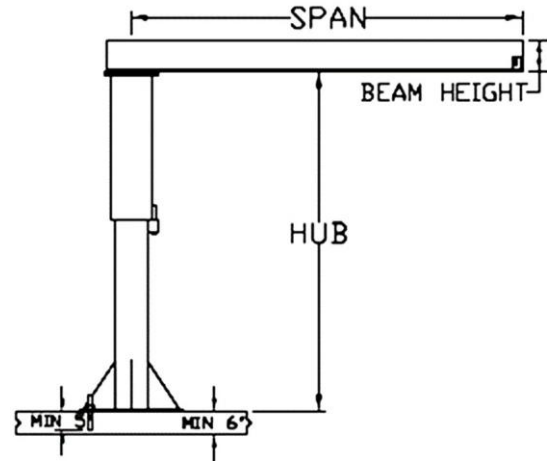

Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Unit Weight
500	FL586	8'	6'	6"	3-3/8"	28"	390#
500	FL588	8'	8'	6"	3-3/8"	28"	420#
500	FL5810	8'	10'	6"	3-3/8"	28"	440#
500	FL5812	8'	12'	6"	3-3/8"	28"	580#
500	FL5814	8'	14'	8"	4"	28"	705#
500	FL5106	10'	6'	6"	3-3/8"	28"	425#
500	FL5108	10'	8'	6"	3-3/8"	28"	455#
500	FL51010	10'	10'	6"	3-3/8"	28"	470#
500	FL51012	10'	12'	6"	3-3/8"	28"	635#
500	FL51014	10'	14'	8"	4"	28"	745#
500	FL5126	12'	6'	6"	3-3/8"	28"	475#
500	FL5128	12'	8'	6"	3-3/8"	28"	490#
500	FL51210	12'	10'	6"	3-3/8"	28"	510#
500	FL51212	12'	12'	6"	3-3/8"	28"	680#
500	FL51214	12'	14'	8"	4"	28"	795#

NOTE:

- Existing concrete must be a minimum of 6" thick reinforced with a minimum 3,000 psi (5 bag mix), soil pressure must support 2,500 psi.
- Concrete in and around the area (6' x 6') of the base plate must be free of cracks and must appear in good condition.
- All units have 28" diameter base and 24" bolt circle 8 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

Options: Tagline Kits

- Epoxy Anchor Kits
- Rotation Stops
- Bolt Pattern Templates
- Outdoor Applications & Stainless Steel
- Hoists & Trolleys

