



4219 E 50TH ST
DES MOINES, IA 50317
800-247-2400

WWW.CENTRALSANDS.COM



Chain Sling Assemblies

Grade 100 Alloy Lifting Chain Slings

Recommended for overhead lifting. Chain and components are heat-treated and proof tested for the published work-load limits. A durable metal tag is attached to each chain sling, identifying the work-load limit, grade, type and the serial number for each specific sling.




Single Leg Chain Slings:




Chain Dia.	Working Load
9/32"	4,300 lbs
5/16"	5,700 lbs
3/8"	8,800 lbs
1/2"	15,000 lbs
5/8"	22,600 lbs
3/4"	35,300 lbs

CO SOS ASOS SOG SSS SGG SGS

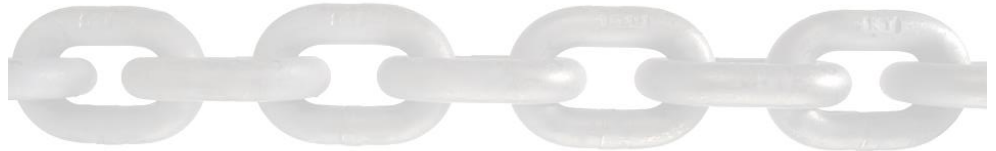

Double Leg Chain Slings:




Chain Dia.	Work Load		Work Load
	60°	45°	30°
9/32"	7,400 lbs	6,100 lbs	4,300 lbs
5/16"	9,900 lbs	8,100 lbs	5,700 lbs
3/8"	15,200 lbs	12,400 lbs	8,800 lbs
1/2"	26,000 lbs	21,200 lbs	15,000 lbs
5/8"	39,100 lbs	32,000 lbs	22,600 lbs
3/4"	61,100 lbs	49,900 lbs	35,300 lbs

DOS ADOS DOG



Triple and Quadruple Leg Chain Slings:



Chain Dia.	Work Load		Work Load
	60°	45°	30°
9/32"	11,200 lbs	9,100 lbs	6,400 lbs
5/16"	14,800 lbs	12,100 lbs	8,500 lbs
3/8"	22,900 lbs	18,700 lbs	13,200 lbs
1/2"	39,000 lbs	31,800 lbs	22,500 lbs
5/8"	58,700 lbs	47,900 lbs	33,900 lbs
3/4"	91,700 lbs	74,900 lbs	53,000 lbs

TOS TOG QOS QOG



Never exceed work load limit. Always follow your domestic safety regulations.