



HFPAB FOUR POINT ADJUSTABLE BEAM

FEATURES

- This standard four point adjustable spread style of lifting beam can be utilized where headroom is limited and when lifting objects that require multiple lift points.
- Supplied with four swivel hooks.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- 100% of ALL lifting beams are Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.
- Made in USA.

OPTIONS

- Beam stand
- Additional sizes and options are available

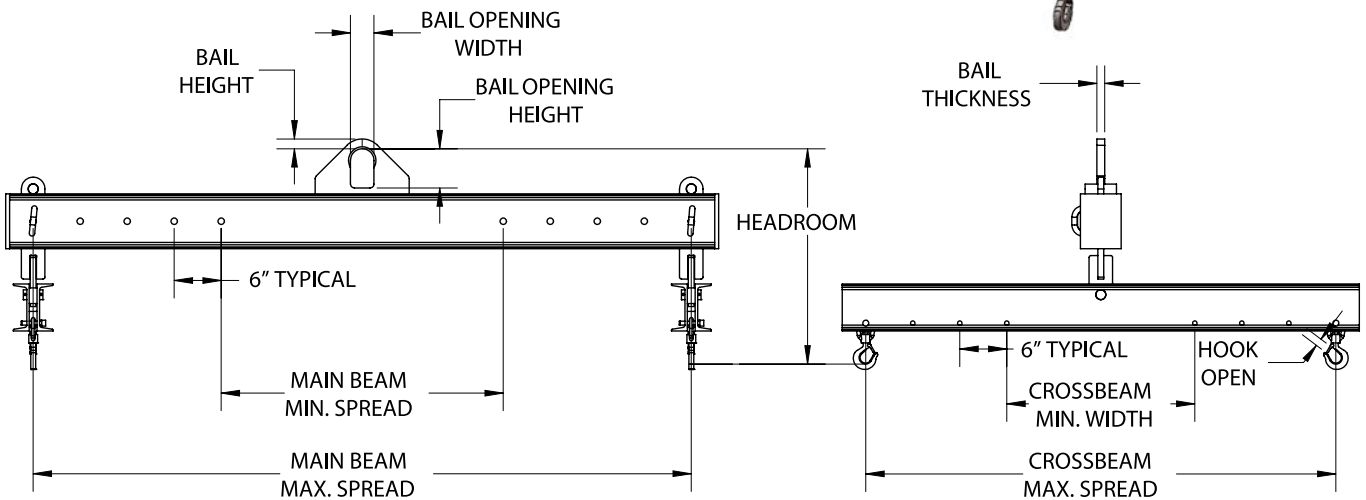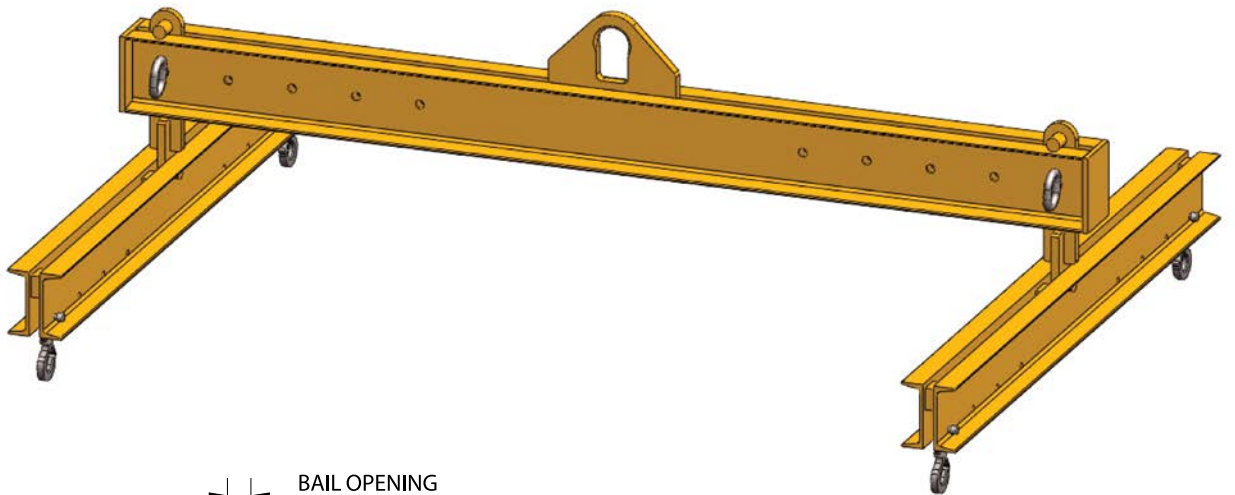

Model #	Capacity (Tons)	Main Beam Min/Max Spread	Cross Beam Min/Max Spread	Dimensions (Inches)						Weight (Lbs.)
				Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
HFPAB-3-84/60	3	36/84	24/60	28	1.25	3	5	1	0.91	473
HFPAB-5-120/96	5	48/120	36/96	33	2	4	7	1.25	1	958
HFPAB-10-144/96	10	72/144	36/96	42	2	4	7	1.25	1.36	1928



WARNING

DO NOT EXCEED CAPACITY!
See the SAFETY GUIDELINES section before using these products. Pages 92–95.