


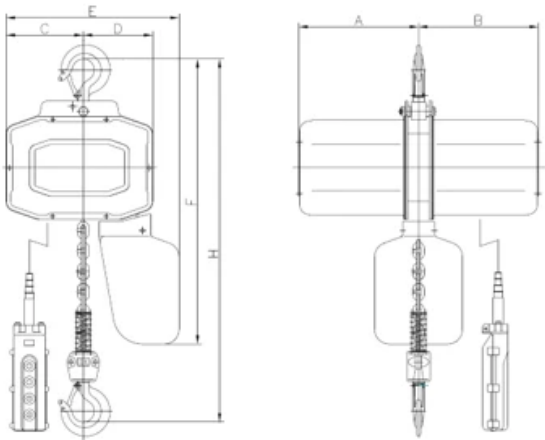

Product Code:	Cap.	Lift Height	Lifting Speed	Motor Output	Power Supply	Control Voltage	Rated Current (amps)		Load Chain Size Ø	Chain Fall Lines	Pendant Cord Length	Total Net Weight:
	<i>Tons</i>	<i>Ft</i>	<i>Ft/min</i>	<i>hp.</i>	<i>Volts (1-Phase)</i>	<i>Volts</i>	@115v	@230v	<i>mm</i>		<i>Ft</i>	<i>Lbs.</i>
HH-B025	1/4	20	26.2	0.6	115/230v	24	8	4	Ø 5	1	18	58.8
HH-B05	1/2	20	23	1.07	115/230v	24	8.5	5	Ø 7.1	1	18	117.5
HH-B10	1	20	23	2.15	115/230v	24	13	6.5	Ø 7.1	1	18	128.5
HH-B20	2	20	11.5	2.15	115/230v	24	13	7	Ø 7.1	2	18	146.8
HH-B30	3	20	7.5	2.15	115/230v	24	14	7	Ø 7.1	3	18	165.1

Product Code:	Cap.	Head Room (H)	A	B	C	D	E	F
	<i>Tons</i>	<i>Inches</i>	<i>Inches</i>	<i>Inches</i>	<i>Inches</i>	<i>Inches</i>	<i>Inches</i>	<i>Inches</i>
HH-B025	1/4	16.93	8.27	8.27	4.57	4.09	10.31	19.69
HH-B05	1/2	19.69	9.65	9.65	6.22	5.59	13.78	23.62
HH-B10	1	20.47	9.65	9.65	6.22	5.59	13.78	23.62
HH-B20	2	24.80	9.65	9.65	4.88	6.93	13.78	24.02
HH-B30	3	27.95	9.65	9.65	4.88	6.93	13.78	24.41